Embodied nervous systems

Gregor Schöner

Braitenberg vehicles

- =embodied nervous systems with:
  - effectors
  - sensors
  - a nervous system
  - a body
- + situated in a structured environment
- = emergent function

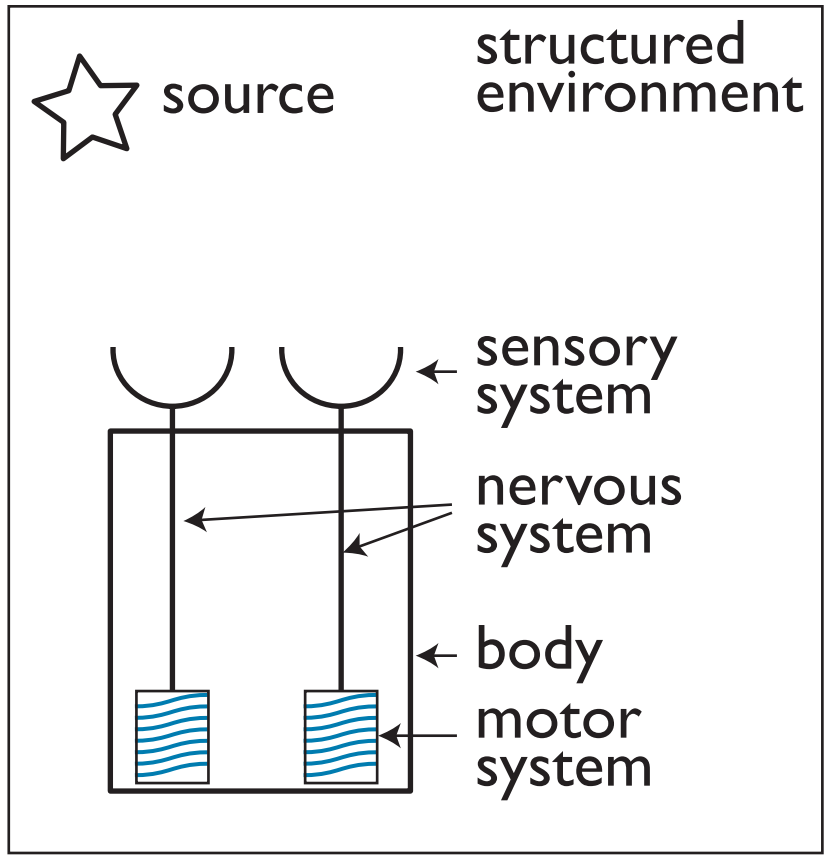

Sensors

- defined by sensor characteristic =relationship between
- the physical stimulus intensity
  - e.g., sound, luminance, chemical concentration, mechanical pressure....
- and an activation variable

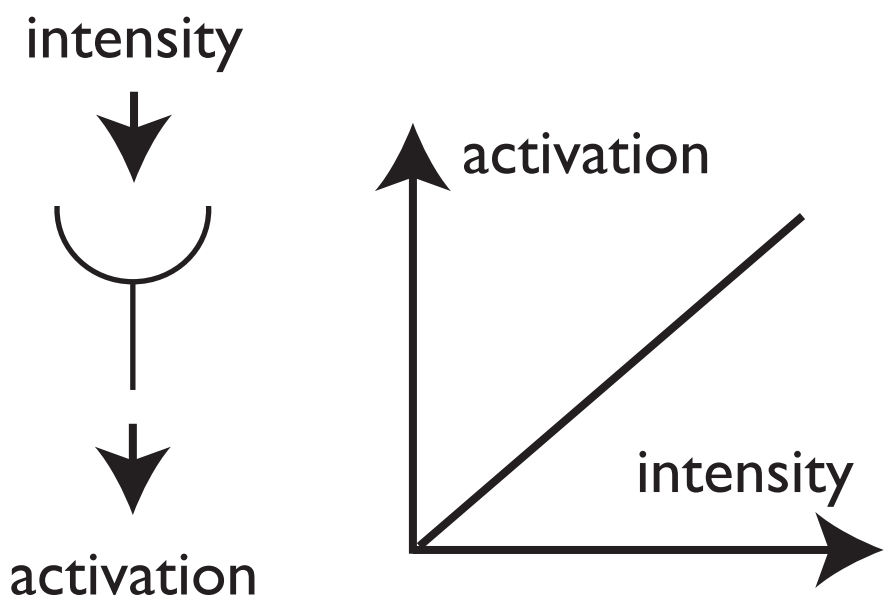

Effectors

- defined by the motor characteristic =functional relationship between
- an activation level
- and a physical effect generated
  - for example: turning rate (rotations per minute rmp), force level, stiffness, ...)

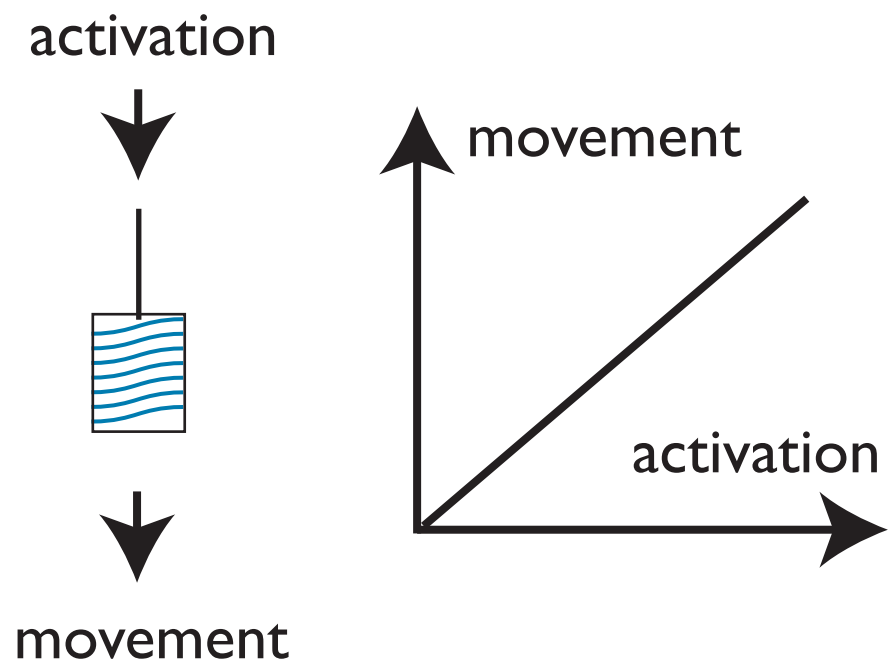

Body

- the body links the sensors and effectors mechanically

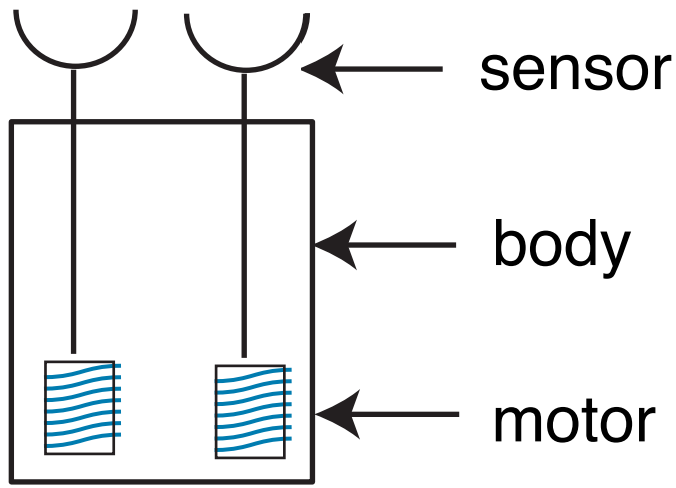

Nervous system

- links sensors to effectors

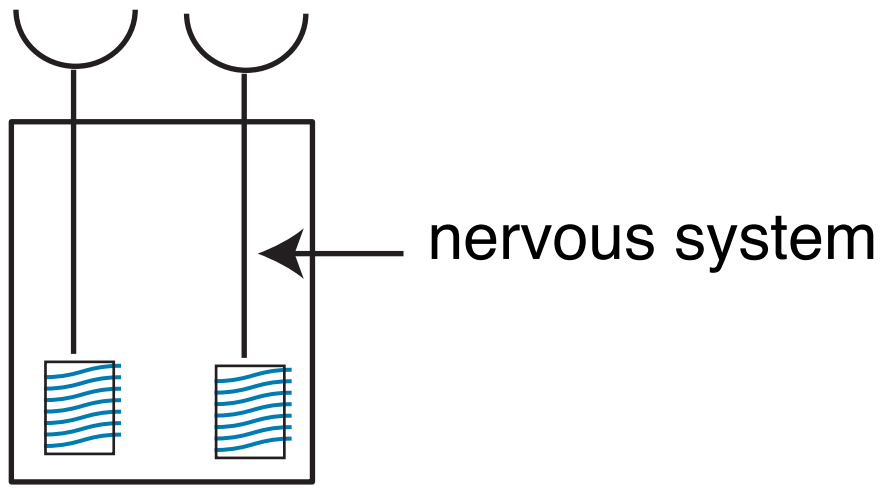

Environment

low intensity

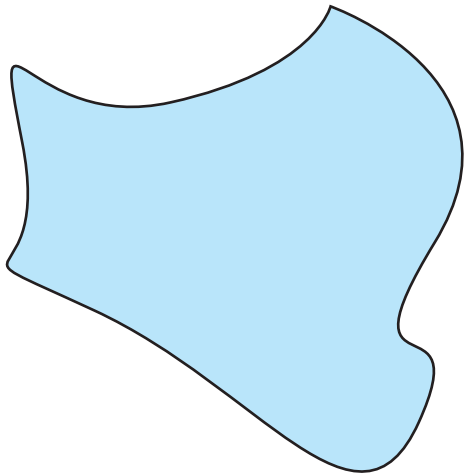

- non-homogeneous with respect to the physical intensity sensed

high intensity

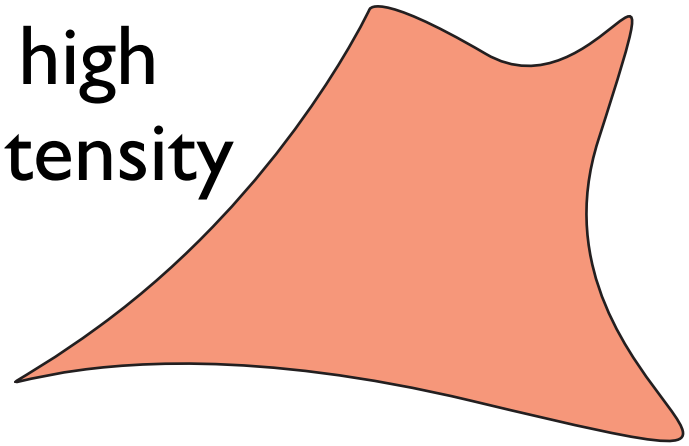

Emergent behavior: taxis

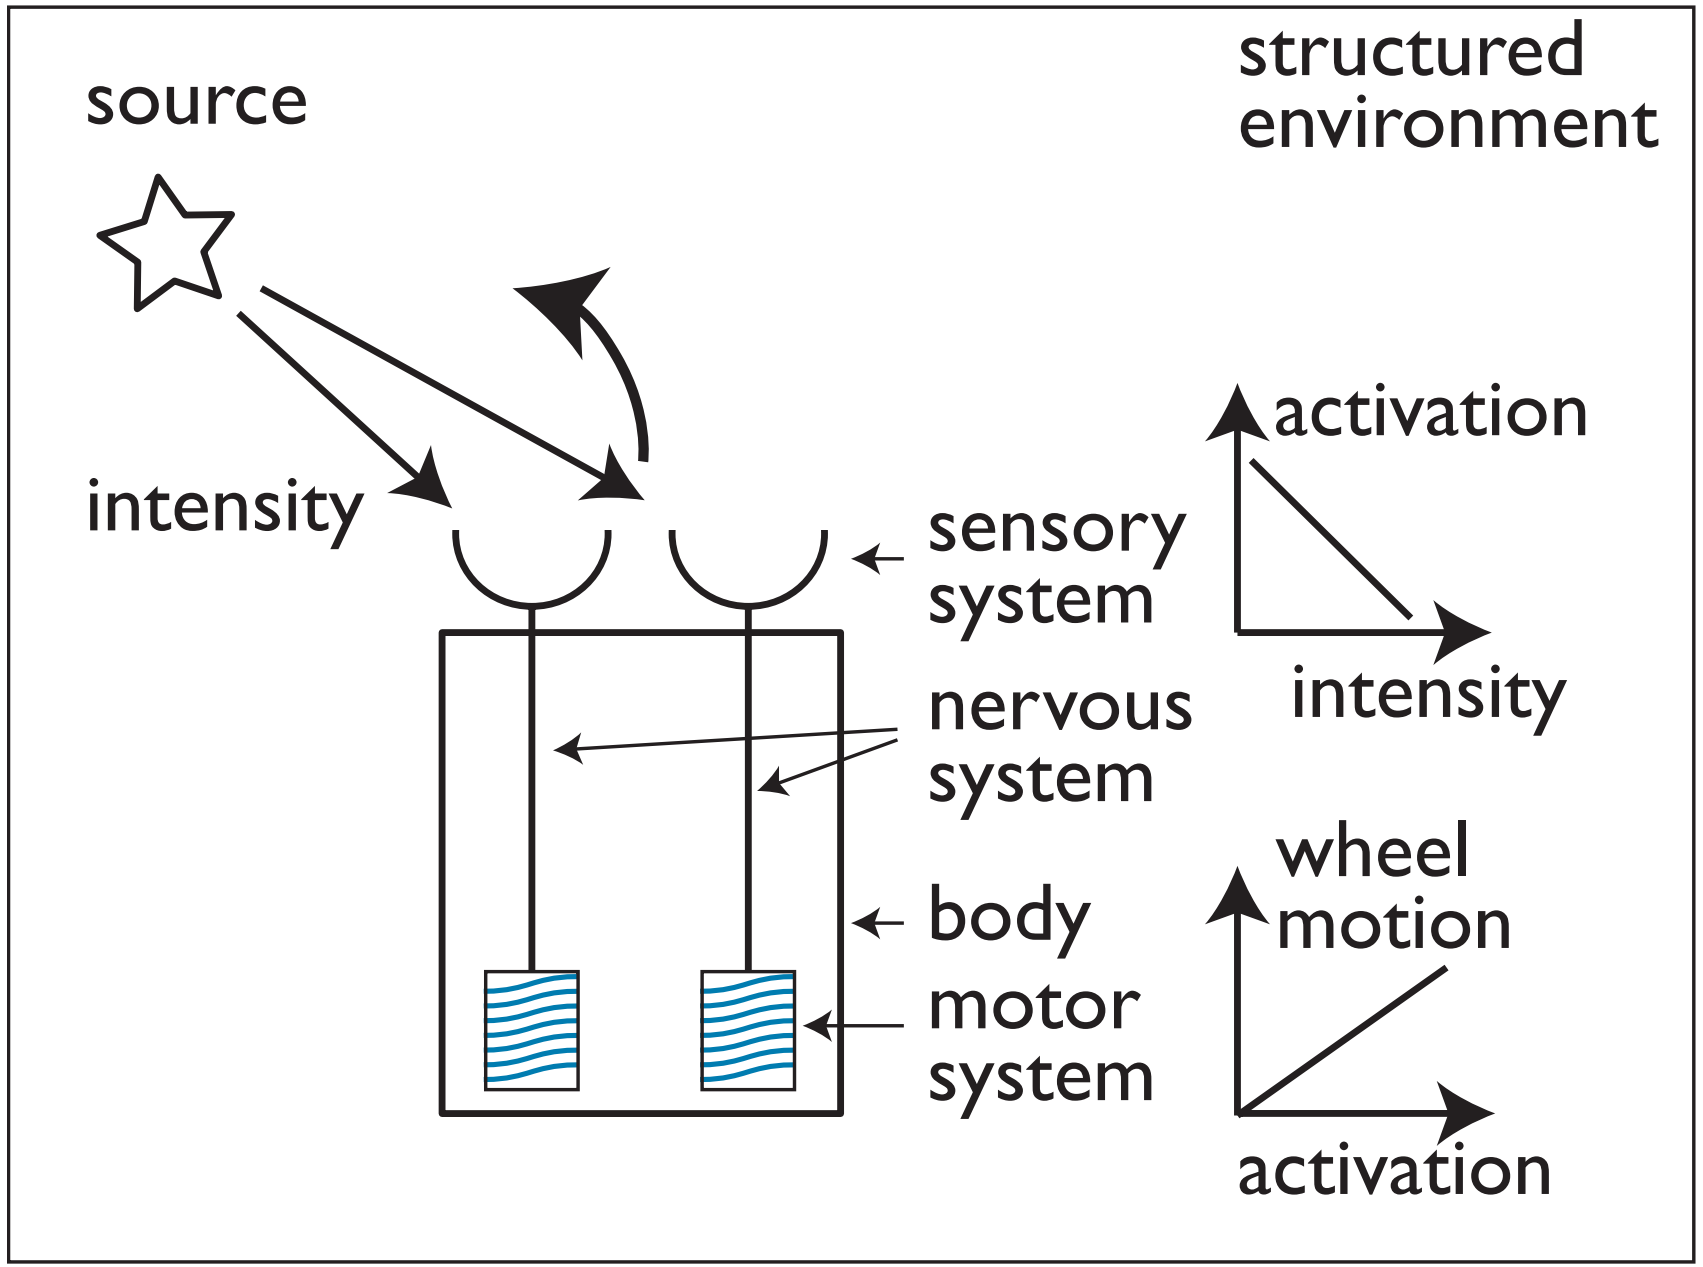

Emergent behavior: this is a dynamics

- feedforward nervous system
- + closed loop through environment
- => (behavioral) dynamics

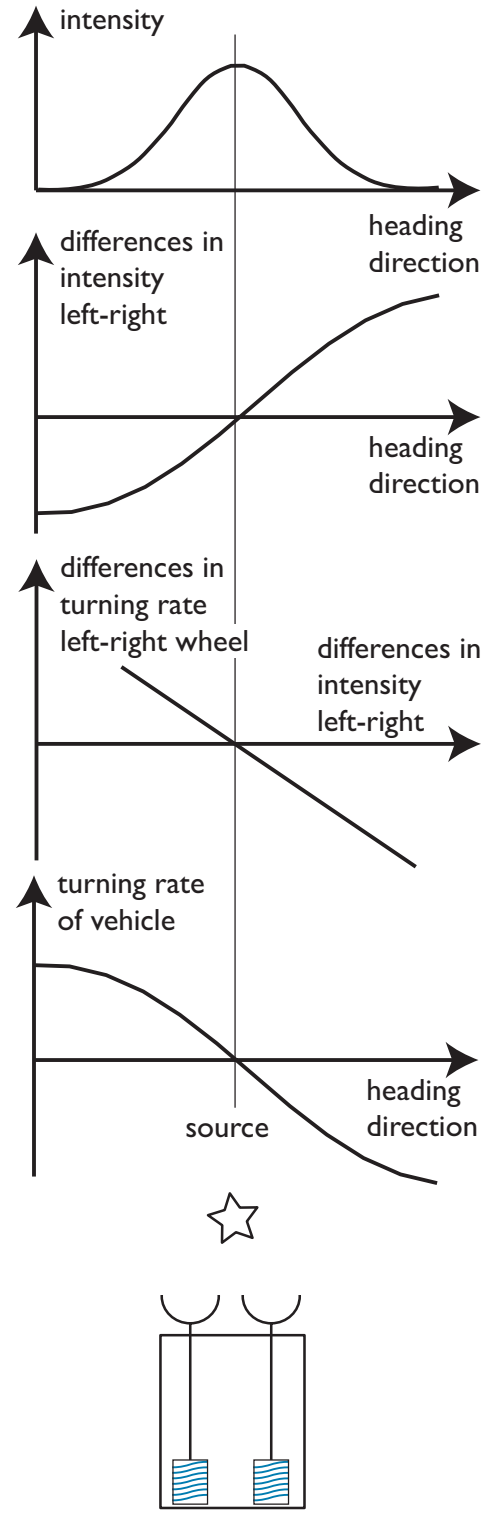

Complex environment => complex dynamics

- bistable dynamics for bimodal intensity distribution
- => nonlinear dynamics makes selection decision

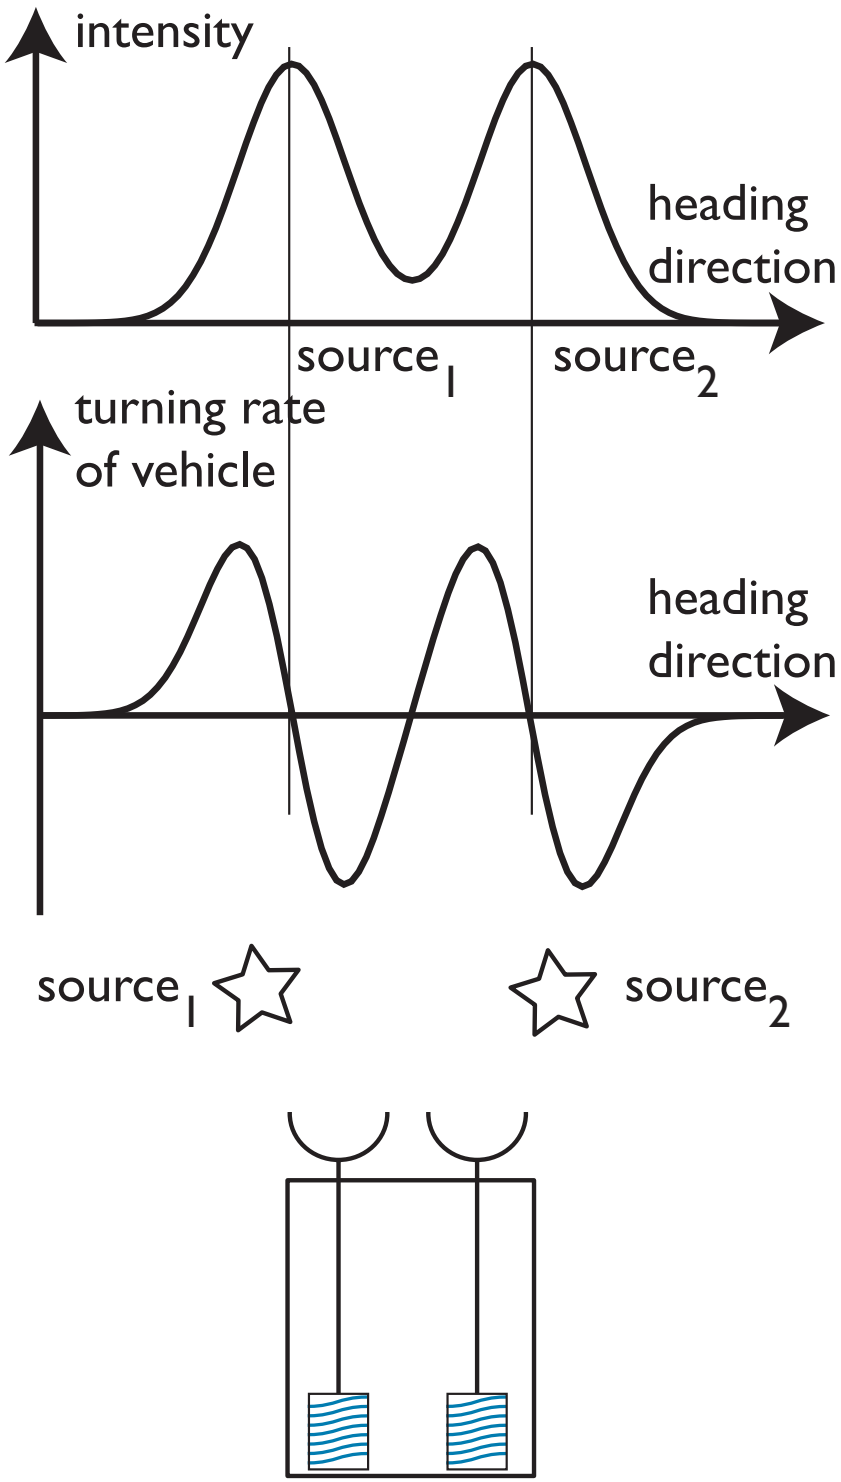

Complex environment => complex dynamics

- transition to monostable for mono-modal distribution
- => instabilities lead to qualitative change of behavior

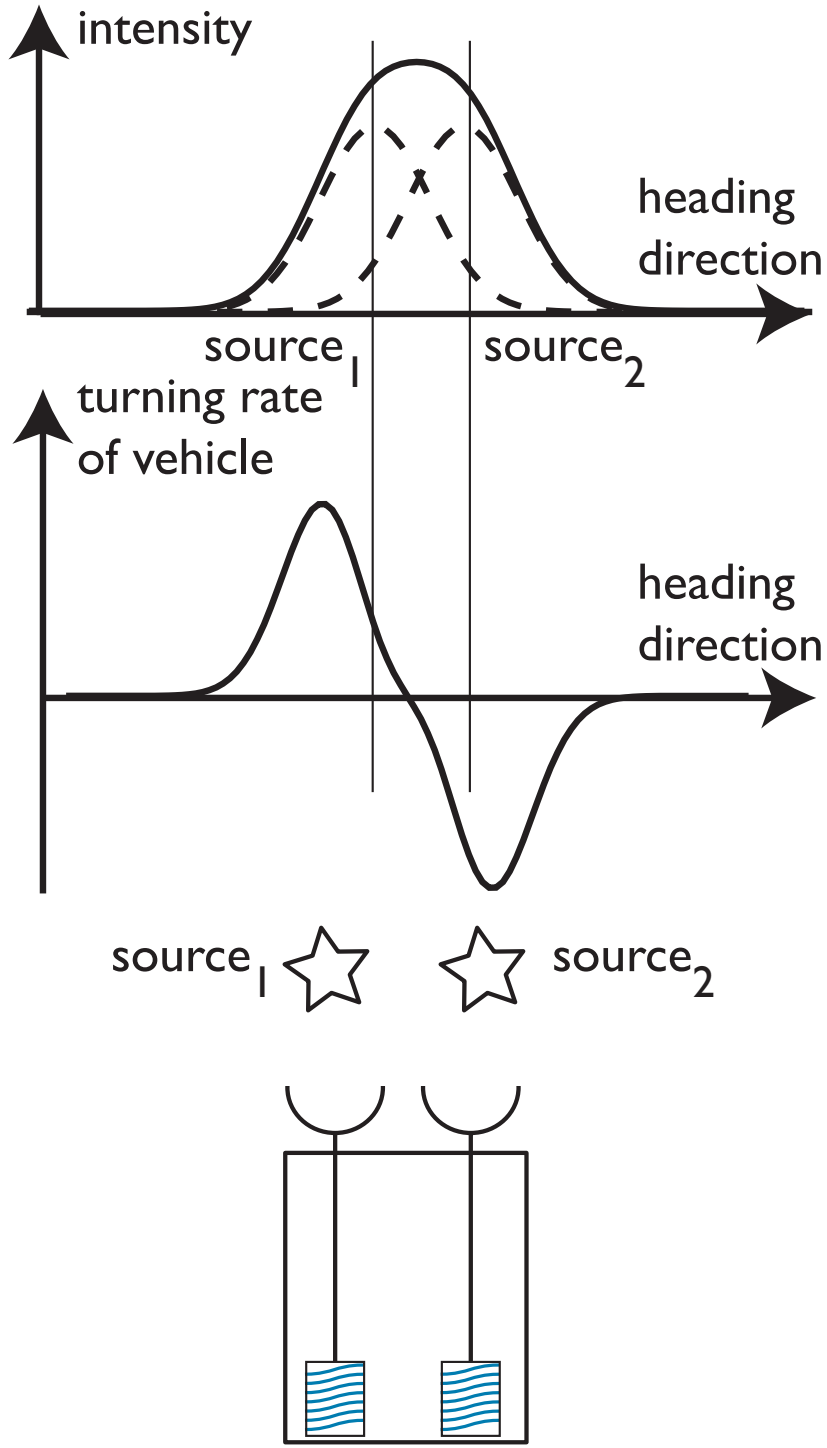

Complex environment => complex dynamics

- transition to monostable for mono-modal distribution
- => instabilities lead to qualitative change of behavior

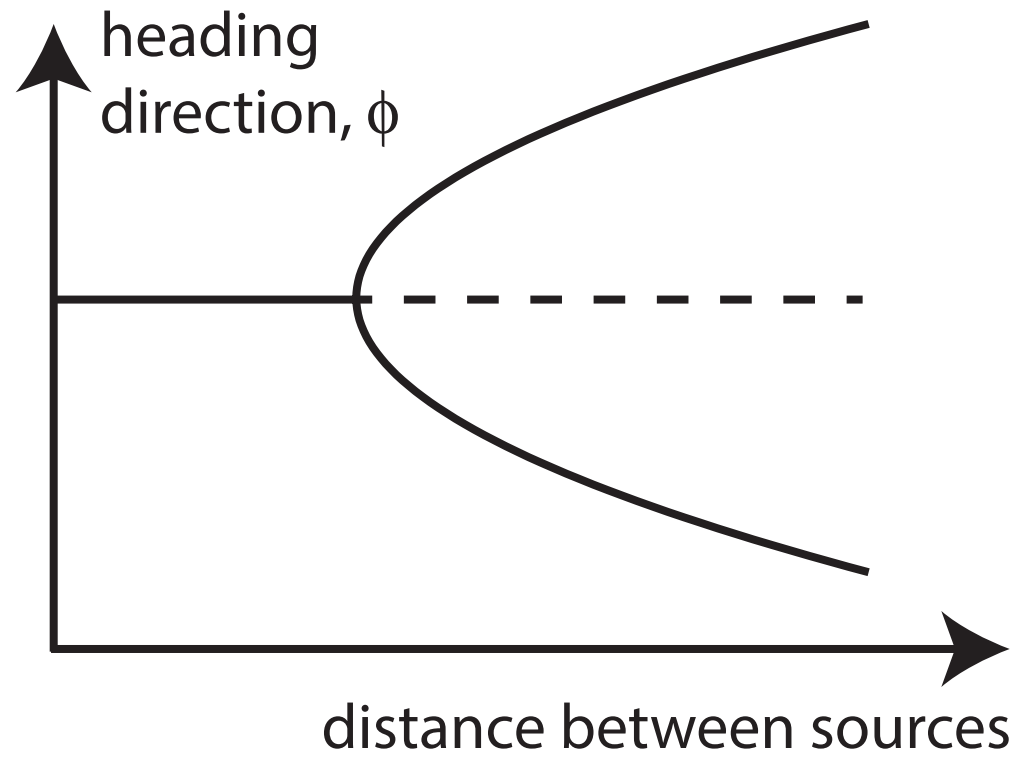

Internal loops generate neural dynamics

- that generate cognition: internal decisions…
- bifurcations => different cognitive regimes

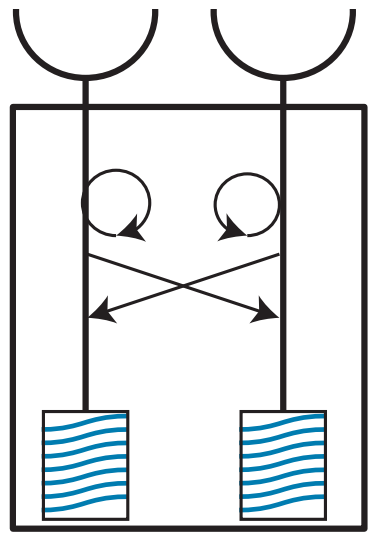

Internal loops generate neural dynamics

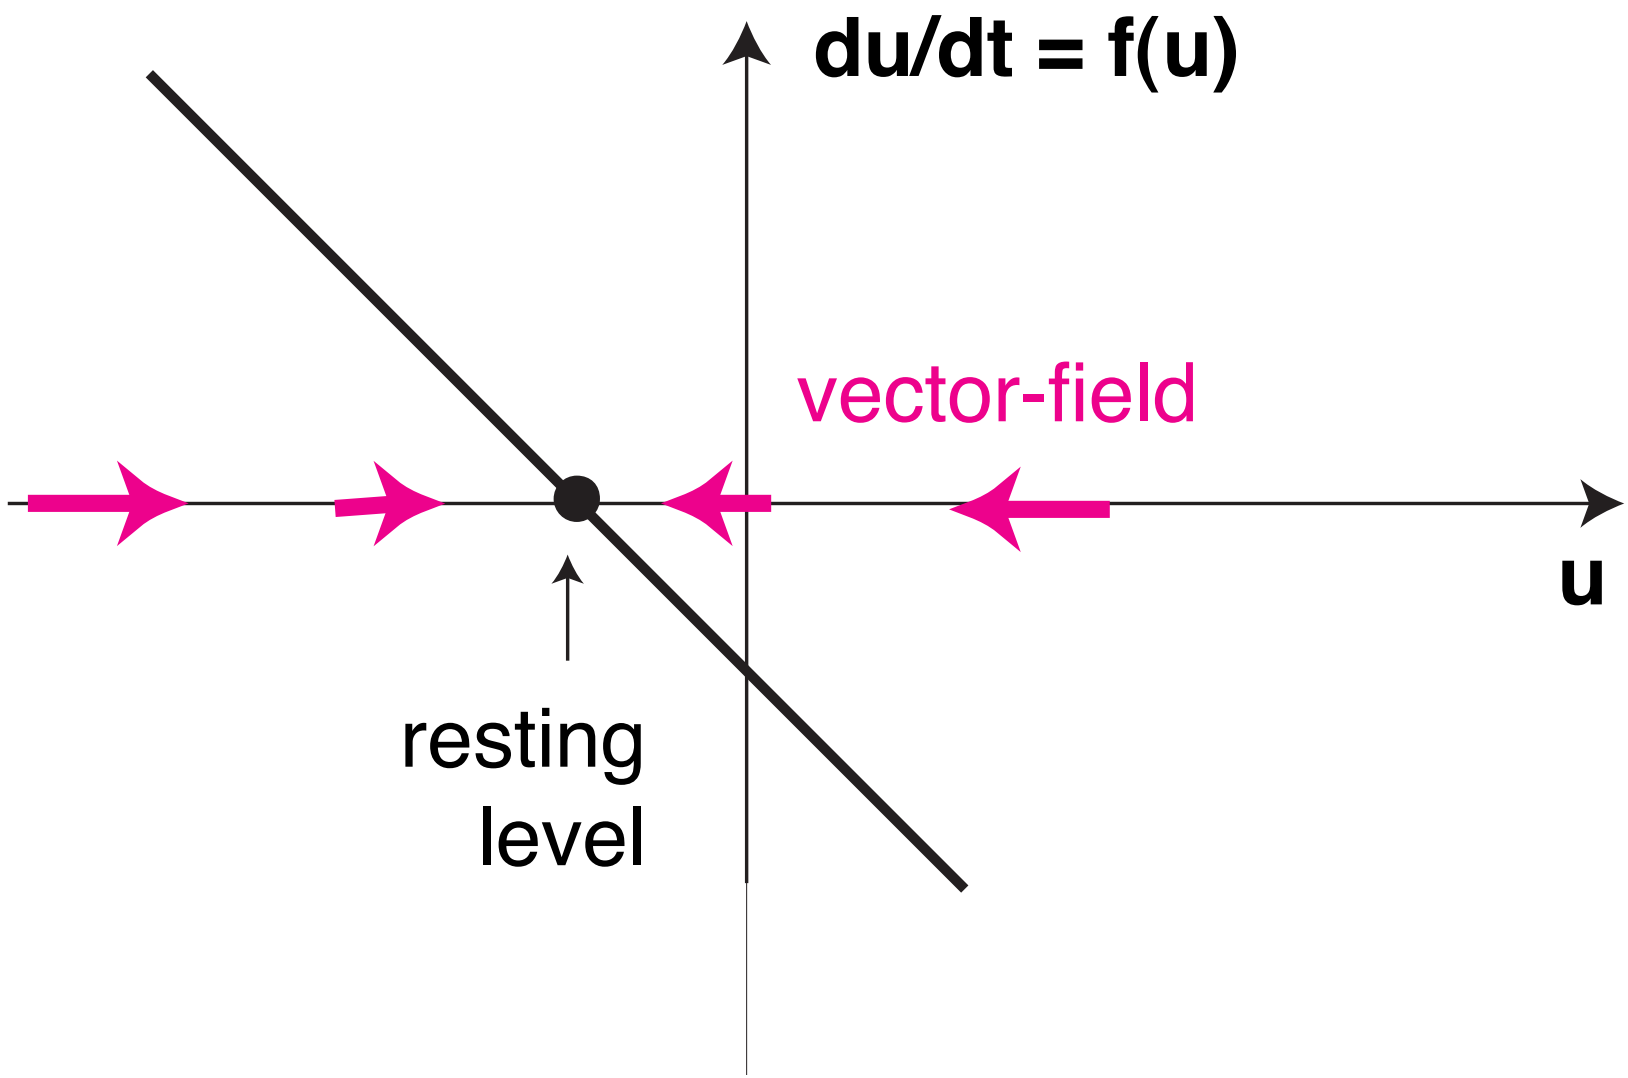

Internal loops generate neural dynamics

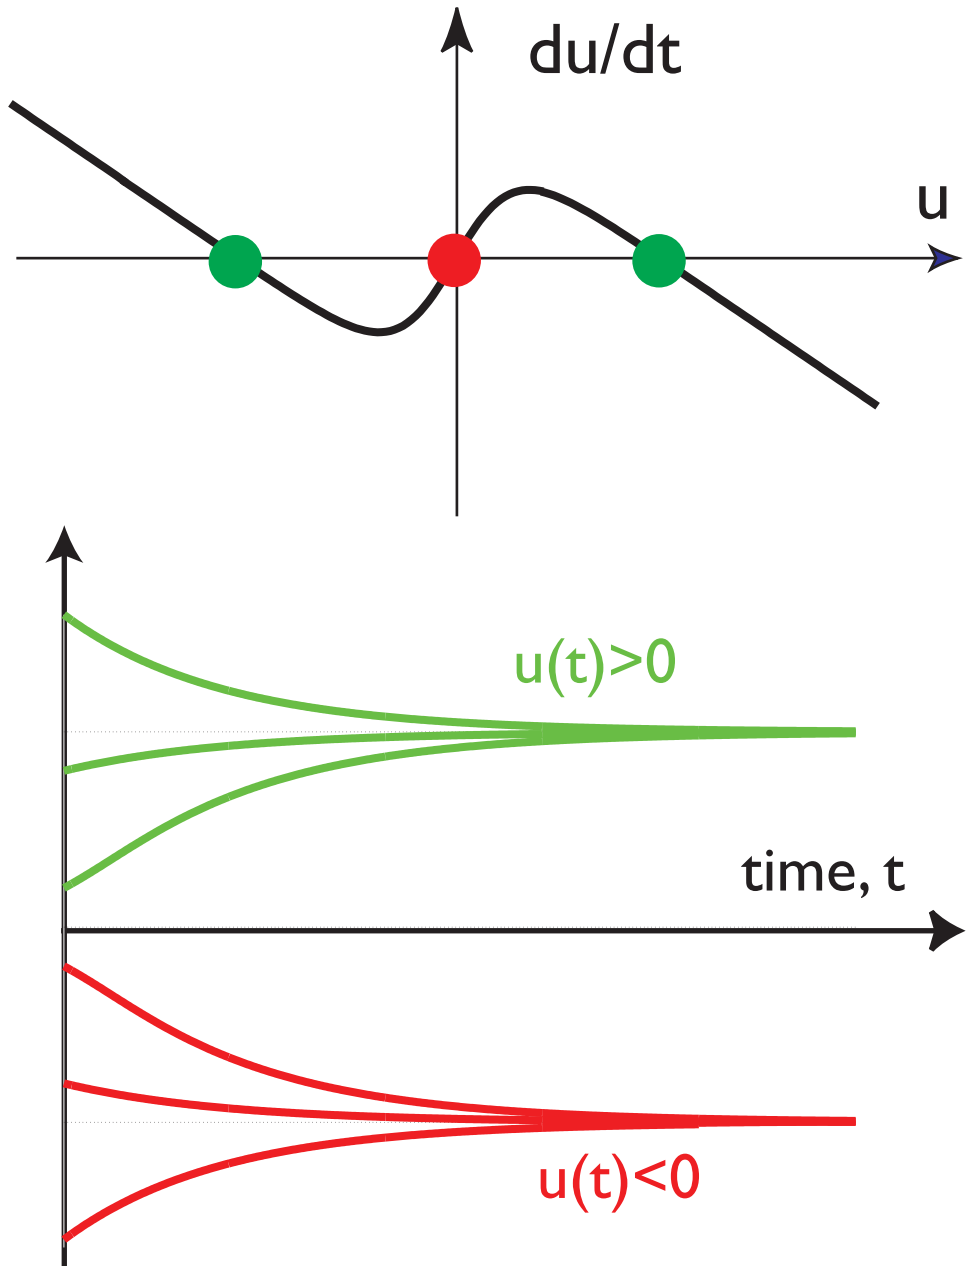

Outlook

- behavioral dynamics
- neural dynamics
- DFT